



# NC270WR



## VOC-Free No Clean Liquid Flux

### Features:

- VOC-Free
- Lead-Free Compatible
- Halide-Free
- Low Post Process Residues
- Broad Process Window
- Excellent Wetting


### Description:

270WR is a VOC-free water-based, halide-free, no-clean liquid flux formulated to offer a very wide process window allowing for extremely good wetting, even to difficult-to-wet materials. 270WR offers a broad activation range, proving to be an excellent flux for a variety of process parameters and applications, including lead-free wave soldering with tin-silver-copper, tin-silver, tin-copper, and other alloys. 270WR offers low post-process residues and has proven to reduce preventative maintenance requirements for spray fluxing applications. In addition, 270WR offers low-fuming and fast solvent evaporation for a VOC-free flux. 270WR is designed to be a no-clean, non-visible residue flux, which can be cleaned if critical to the product application.

### Application:

- 270WR is ready to use directly from the container for spray systems.
- When spray fluxing, it is imperative that proper flux coverage and uniformity be achieved and maintained. A dry flux coating of 500 to 1500 micrograms per square inch is necessary.
- When complete nitrogen sealed wave solder equipment is used, it is generally necessary to apply slightly more flux than normal as a result of excess drying due to the extended length of the equipment.

### Thermal Profile:

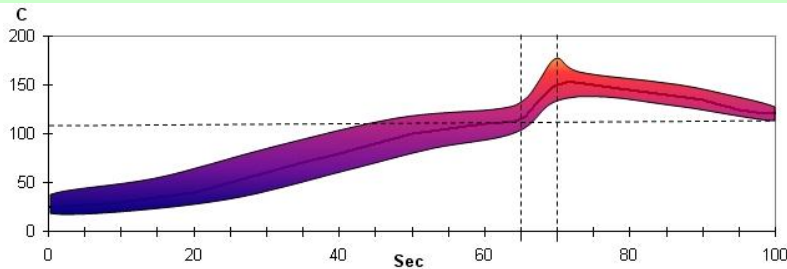

<b>RATE of RISE</b> 2-3 °C / SEC MAX	<b>PROGRESS THROUGH</b> 66°C - 77°C ( 150 - 170°F )	<b>PCB TOP SIDE TEMP</b> 90°C - 125°C (194°F - 257°F )	<b>COOLDOWN</b> ≤ 4°C
	≤ 40 SECONDS	JUST BEFORE WAVE	

### Cleaning:

270WR can be cleaned, if necessary, with water, and enhanced cleaning can be achieved through the use of a saponifier. Deionized water is recommended for the final rinse. A temperature of 38°C - 65°C (100° - 150°F) is sufficient for removing any residues. An in-line or other pressurized spray cleaning system is suggested, but is not required.

### Handling:

- 270WR has a sealed shelf life of nine (9) months at room temperature.
- Keep away from sunlight as it may degrade the product.
- 270WR is shipped ready to use; no mixing is necessary.
- Do not mix used and unused chemical in the same container. Reseal any open containers.
- Optimal storage condition is 25° - 30°C (75° - 85°F), acceptable storage conditions range from 4° - 40° C (40 - 100°F).

**Safety:**

- Use with adequate ventilation and proper personal protective equipment.
- Refer to the accompanying **Material Safety Data Sheet** for any specific emergency information.
- Do not dispose of any waste materials in non-approved containers.

**Physical Properties:**

Parameter	Value
J-STD-004	ORL0
Visual	Colorless to light yellow
Solids Content	3.76%
Acid Number	34.54 mg KOH per gram flux
Specific Gravity	1.0100
pH (1% solution /water)	2.59

**Corrosion Testing:**

Parameter	Requirements	Results
Copper Mirror (24 hrs @ 25°C,50%RH)	IPC-TM-650-2.3.32	Low
Halide Test (Silver Chromate)	IPC-TM-650-2.2.33	Pass

**Surface Insulation Resistance:**

Reference	Property	Pass-Fail Criteria	Results
IPC-TM-650 method 2.6.3.3 85°C / 85% R.H.	Control coupons	>1E+9 $\Omega$ at 96 and 168 hrs	2.12E+10 $\Omega$ and 1.70E+10 $\Omega$ Pass
	Sample coupons – pattern up	>1E+8 $\Omega$ at 96 and 168 hrs	1.70E+10 $\Omega$ and 1.49E+10 $\Omega$ Pass
	Sample coupons – pattern down	>1E+8 $\Omega$ at 96 and 168 hrs	1.06E+10 $\Omega$ and 1.07E+10 $\Omega$ Pass
	Post-test visual inspection	No dendrite growth or corrosion	Pass
Bellcore GR-78 35°C / 85% 4 days	Sample coupons – pattern up	>1E+10 $\Omega$	2.33E+10 $\Omega$ – Pass
	Sample coupons – pattern down	>1E+10 $\Omega$	5.91E+10 $\Omega$ – Pass

**Electromigration:**

Test	Conditions	Specification	Results
Electromigration Bellcore GR-78 Flux Requirements	65°C/85% R.H. 500 hrs – Pattern up	Rf/Ri > 0.1	2.63E+10 $\Omega$ / 3.68E+10 $\Omega$ – Pass
	65°C/85% R.H. 500 hrs – Pattern down	Rf/Ri > 0.1	3.00E+10 $\Omega$ / 1.57E+10 $\Omega$ – Pass

Manufacturing and Distribution Worldwide

Americas +1-401-463-5605 · Europe +44-1737-222-258 · Asia-Pacific +852-2649-7183 · info@aimsolder.com · www.aimsolder.com

AIM IS ISO9001:2000 CERTIFIED

The information contained herein is based on data considered accurate and is offered at no charge. Product information is based upon the assumption of proper handling and operating conditions. All information pertaining to solder paste is produced with 45-micron powder. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated. Please refer to <http://www.aimsolder.com/terms.cfm> to review AIM's terms and conditions.

08/09  
Rev 9